

ISHL Series

Self-Contained Strobe for Hazardous Locations

Heavy Duty High-intensity strobe warning for Class I, Division 2 environments.

The ISHL is a cost effective strobe solution for hazardous locations requiring a superior, attention getting warning signal.

The ISHL offers versatility. It is water tight and corrosion resistant, making it a good choice for equipment and areas subject to washdown. Designed to resist vibration, the ISHL can be used on or near heavy equipment and machinery.

FEATURES

- UL Listed for Class I, Division 2 environments.
- Ideal for NEMA 4X environments (water tight and corrosion resistant).
- Three pin, plug-in flash tube secured in place with two retaining screws for added vibration resistance.
- Heavy Duty Base, cast from corrosion-resistant *ALMAG 35* aluminum alloy, offers superior durability. *
- Base includes integral 3/4" NPT pipe mount.
- Shatter-resistant polycarbonate dome available in all five safety colors.
- Internal Control Relay, ICR, allows low-power on/off switching activated by simple closure. *
- Clear, smooth outer dome will not accumulate dust.
- Ideal for washdown applications.

* A Whelen exclusive.

MODELS

- ISHL120*, 120 VAC, UL Listed.

WHELEN[®]
ENGINEERING COMPANY, INC.



ISHL Series

Specification Data

TECHNICAL SPECIFICATIONS

Model	Voltage	Current	Flashrate	Candela	Electrical Connection	Mount	Weight
ISHL120	120 VAC	.35amps	80 FPM	334*	4 wires 2-power; 2-control	3/4" Pipe	2.4lbs. (5.3kg.)


* Measured in clear.

WHELEN[®]
ENGINEERING COMPANY, INC.


CERTIFICATION

UL LISTED (ISHL120). Class I, Division 2.

DIMENSIONS

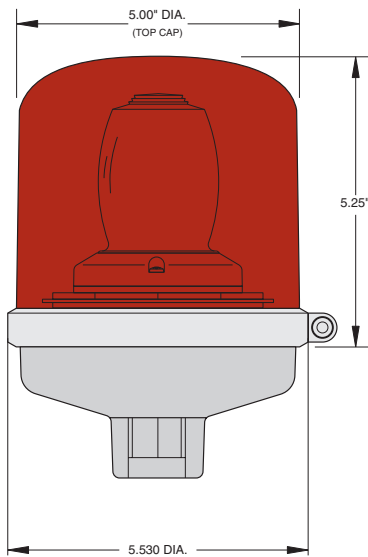

EXPLODED VIEW

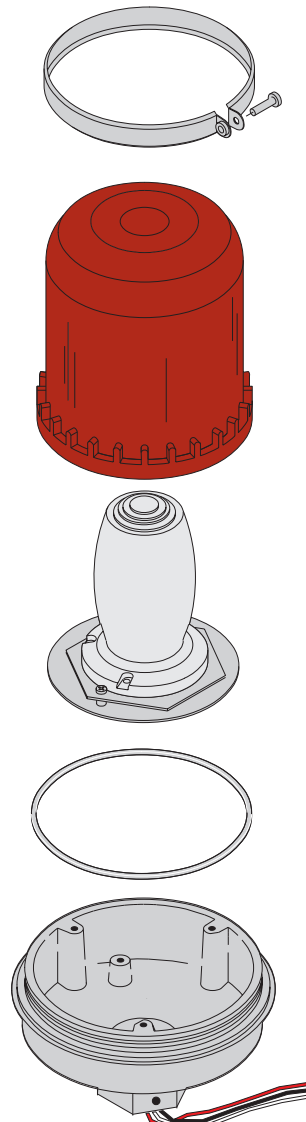

Printed in the U.S.A.
032999-ISHLPB-10482B

SignalGuys.com

REPLACEMENT PARTS

Description	Part Number
Flash Tube	01-0422071-00
Domes	
Amber	68-4180190-10
Blue	68-4180190-20
Clear	68-4180190-30
Green	68-4180190-40
Red	68-4180190-50
Power Supply	02-0168262-00

HOW TO ORDER

Model ISHL120*

* Replace asterisk in model number with lens color desired:

A=Amber; **B**=Blue; **C**=Clear; **G**=Green; **R**=Red.