

**Direct-View LED Traffic Controller**  
*TCL217RAG-226 Traffic Signal*

**ILLUMINATION SOURCE**

Super bright, wide viewing angle LED's  
 Also available in Green, Red, Blue, or Amber LED's  
 Long life; Up to 100,000+hours



**ELECTRICAL**

Integrated solid state power supply  
 120 VAC Standard; Optional Voltages 12 VDC to 277 VAC  
 RED 0.03 Amps Maximum; AMBER 0.02 Amps Maximum; GREEN 0.02 Amps Maximum  
 UL / CUL Approved for Wet Location

**CONSTRUCTION**


Cabinet - Slim Line single piece extruded aluminum housing  
 Back plate - 0.050" Aluminum with two 7/8" diameter knockouts for electrical connections and four 3/8" knockouts for wall mounting.  
 Lens Material - Impact resistant tinted polycarbonate

**FINISH**

Cabinet - Standard Duranodic Bronze  
 Custom colors available upon request

**INSTALLATION**

Lift 'n Shift wall mounted back plate bolts to wall surface; unit hinges on back plate allowing easy electrical connection without holding sign. Back is secured to cabinet frame using two screws to complete installation.

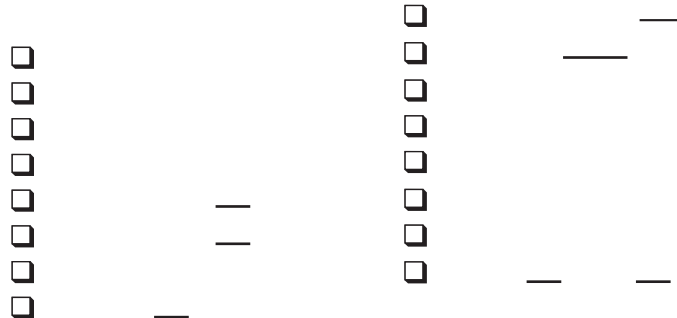

**Product View**



**MODEL NUMBER**

TCL217RAG-226

**CABINET DIMENSIONS**

21" H x 7" L x 2.5" D

**LENS DIAMETER**

5 Inches

**MESSAGE**

Traffic Signal

**MESSAGE COLOR**

Red / Amber / Green

**LIGHT SOURCE**

Direct-View LED